

# OMNIDOTS SWARM Battery V3

Vibration Monitoring System

## Product Specifications

Generated at the 12th of October 2020, at 02:08:42 pm

### OUTPUT

Nominal Voltage Output	5.0 VDC (Weipu 4P connector)
Maximum current	2 A
Normal capacity	104 Ah
Energy capacity	375 Wh
Optimal working temperature	-10° to 65° Celcius (14° to 149° Fahrenheit)

### CHEMISTRY

Battery composition	Lithium-ion (NMC)
---------------------	-------------------

### USE

Life time	> 400 charge cycles
Depth of discharge	80% DOD
Optimal storage temperature	-10° to 55° Celcius (14° to 131° Fahrenheit)
Control	Button for on / off / capacity check

### COMMUNICATION

Electronics architecture	System-on-chip (on VDC output)
--------------------------	--------------------------------


### SAFETY

Ingress protection rate	IP 65 (protection from dust and water jetting)
Electronics protection	Temperature / over <sup>(dis)</sup> charge / shortcircuit

## CHARGING\*

Maximum charge	4.2 VDC (Weipu 2P connector)
Maximum current	10 A
Optimal charge temperature	-10° to 40° Celcius (14° to 104° Fahrenheit)
Official 4.2V 5A charger	Separately available

\* Charge time is determined by available voltage and current; simultaneous use and charging is possible

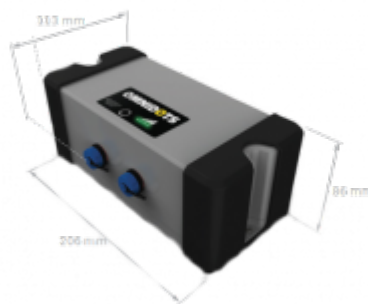

## DIMENSIONS

Measurements	206 x 113 x 86 mm (8.11 x 4.45 x 3.39 inch)
Mounting holes	2 x Ø 5,5 mm (Ø 0,22 inch)
Weight	Approx. 2 kg (4.41 lbs)

## QUALITY

Certifications	UN 38.8 / MSDS / CE
----------------	---------------------

Generated at the 12th of October 2020, at 02:08:42 pm

**OMNIDOTS** | Verbindingsweg 8 | 9781 DA | Bedum | The Netherlands | +31 85-0700 336  
| info@omnidots.com | VAT: NL854237677B01 | CoC: 61169935 | Bank: NL19ABNA0417607237